


Convolved Tubing & Accessories

Black Polypropylene Connectors For Convolved Tubing
Accessories Measured By Tubing Diameter



Colored & Black Flexible Polyethylene Tubing
Tubing Split For Easy Wire Insertion
Operating Temperature -30°F to 200°F (-34°C to 93°C)

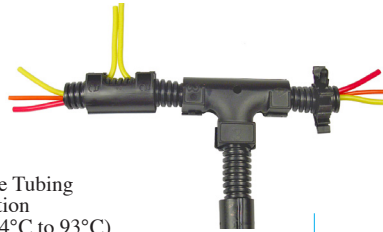

OUTLET FITTING
Holds Loom Tight At Breakouts

I.D.	Color	Part #	Qty	Part #	Qty	Part #	Qty	Part #	Qty
1/4"	Black	5140AA	500'	5140A	50'	5140C	14'	5140PT	14'
1/4"	Red	5150AA	500'	5150A	50'	5150C	14'	5150PT	14'
3/8"	Black	5141AA	500'	5141A	50'	5141C	10'	5141PT	10'
3/8"	Yellow	5131AA	500'	5131A	50'	5131C	10'	5131PT	10'
3/8"	Red	5151AA	500'	5151A	50'	5151C	10'	5151PT	10'
1/2"	Black	5142AA	500'	5142A	50'	5142C	7'	5142PT	7'
5/8"	Black	5144AA	250'	5144A	50'	5144C	6'	5144PT	6'
3/4"	Black	5143AA	250'	5143A	50'	5143C	5'	5143PT	5'
1"	Black	5145AA	100'	—	—	—	—	—	—
1-1/4"	Black	5146AA	100'	—	—	—	—	—	—
1-1/2"	Black	5147AA	50'	—	—	—	—	—	—
2"	Black	5148AA	50'	—	—	—	—	—	—
Assorted		0006-CV1		Package of 1/4", 3/8", 1/2", 5/8", 3/4"					

Left - Right	Part #	Qty
1/2" - 1/2"	5107A	25
1/2" - 1/2"	5107C	1
1/2" - 1/2"	5107PT	1

TEE FITTING
Allows For Continuous Coverage Of Breakout Wires With Tubing



Left-Center-Right	Part #	Qty
3/8" - 3/8" - 3/8"	5110A	25
3/8" - 3/8" - 3/8"	5110C	1
3/8" - 3/8" - 3/8"	5110PT	1
1/2" - 1/2" - 1/2"	5111A	25
1/2" - 1/2" - 1/2"	5111C	1
1/2" - 1/2" - 1/2"	5111PT	1
3/4" - 3/8" - 3/4"	5112A	25
3/4" - 3/8" - 3/4"	5112C	1
3/4" - 3/8" - 3/4"	5112PT	1
3/4" - 1/2" - 3/4"	5113A	25
3/4" - 1/2" - 3/4"	5113C	1
3/4" - 1/2" - 3/4"	5113PT	1

High Temp Convolved Tubing




Flexible Black Nylon Tubing
With Gray Stripe
Tubing Split For Easy Wire Insertion
Temperature Rating:
-40°F to 300°F (-40°C to 149°C)


I.D.	Part #	Qty	Part #	Qty
1/4"	5170AA	500'	5170A	100'
3/8"	5171AA	500'	5171A	100'
1/2"	5172AA	500'	5172A	100'
5/8"	5173AA	250'	5173A	100'
3/4"	5174AA	250'	5174A	100'

Spi Wrap

Expandable Spiral Cut Polyethylene Wrap
Retains Strength Under Repeated Flexing
Operating Temperature:
-105°F to 215°F (-76°C to 102°C)
Natural Color
Measured By Outside Diameter Of Unexpanded Wrap
(Wire Not Included)

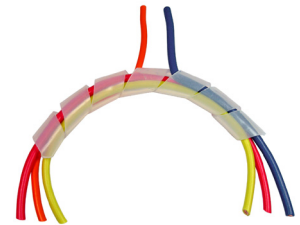

Fabric Loom



Flexible For Easy Wire Insertion
Saturated With Asphalt Compound
For Moisture Proof
Fabric Provides Against Short Circuits
Maximum Temperature 350°F (177°C)


I.D.	Part #	Qty	Part #	Qty
3/16"	8212A	250'	8212S	50'
1/4"	8213A	250'	8213S	50'
1/4"	8213C	10'	8213PT	10'
5/16"	8211A	250'	8211S	50'
3/8"	8214A	250'	8214S	50'
3/8"	8214C	7'	8214PT	7'
1/2"	8215A	250'	8215S	50'
1/2"	8215C	5'	8215PT	5'
5/8"	8216A	250'	8216S	50'
3/4"	8217A	250'	8217S	25'
1"	8218A	250'	8218S	25'

PACKAGE OF ASSORTED SPI WRAP SIZES

Part #	Qty
5126C	15'
5126PT	15'

O.D.	Part #	Qty	Part #	Qty
1/8"	5118A	100'	—	—
3/16"	5119A	100'	—	—
1/4"	5120A	100'	—	—
1/4"	5120C	5'	5120PT	5'
3/8"	5121A	100'	—	—
3/8"	5121C	5'	5121PT	5'
1/2"	5122A	100'	—	—
1/2"	5122C	5'	5122PT	5'
3/4"	5123A	100'	—	—
1"	5124A	100'	—	—

Grommets



Flexible Oil Resistant Grommets
Insert Into Pre drilled Holes
Guard Against Cut & Frayed Wires
Operating Temperature -31°F to 160°F (-35°C to 71°C)

PACKAGE OF ASSORTED GROMMET SIZES

Part #	Qty
6110C	15
6110PT	15
6126QT	6

Available In Kits
#0001-G, #0003-G
& #0004-G
(Page 2)



A	B	C	Part #	Qty	Part #	Qty	Part #	Qty	Part #	Qty
1/8"	1/4"	1/16"	6115A	1000	6115D	20	6115PT	50	6115QT	7
1/8"	1/4"	1/16"	6115C	50	6115M	7	6115KT	20	—	—
3/16"	5/16"	1/16"	6116A	1000	6116D	18	6116PT	50	6116QT	6
3/16"	5/16"	1/16"	6116C	50	6116M	6	6116KT	18	—	—
1/4"	3/8"	1/16"	6117A	500	6117D	15	6117PT	50	6117QT	5
1/4"	3/8"	1/16"	6117C	50	6117M	5	6117KT	15	—	—
5/16"	7/16"	1/16"	6118A	500	6118D	10	6118PT	40	6118QT	5
5/16"	7/16"	1/16"	6118C	40	6118M	5	6118KT	10	—	—
3/8"	1/2"	1/16"	6119A	500	6119D	10	6119PT	40	6119QT	5
3/8"	1/2"	1/16"	6119C	40	6119M	5	6119KT	10	—	—
1/2"	5/8"	1/16"	6120A	250	6120D	8	6120PT	20	6120QT	3
1/2"	5/8"	1/16"	6120C	20	6120M	3	6120KT	8	—	—
7/16"	1 1/16"	1/8"	6121A	250	6121D	5	6121PT	15	6121QT	2
7/16"	1 1/16"	1/8"	6121C	15	6121M	2	6121KT	5	—	—
5/8"	7/8"	1/16"	6122A	100	6122D	4	6122PT	10	6122QT	2
5/8"	7/8"	1/16"	6122C	10	6122M	2	6122KT	4	—	—
1 1/16"	1"	1/16"	6123A	100	6123D	2	6123PT	5	6123QT	1
1 1/16"	1"	1/16"	6123C	5	6123M	1	6123KT	2	—	—
3/4"	1-1/16"	1/8"	6124A	100	6124D	2	6124PT	4	6124QT	1
3/4"	1-1/16"	1/8"	6124C	4	6124M	1	6124KT	2	—	—
1/2"	13/16"	1/4"	6125A	100	6125D	4	6125PT	6	6125QT	1
1/2"	13/16"	1/4"	6125C	6	6125M	2	6125KT	2	—	—
1"	1-3/8"	1/8"	6127A	25	6127C	3	6127PT	3	—	—

All Items with QT, KT, GT or PT Suffix are Clam Shell Program Items.